


## CT125

The CT 125 is part of MAX POWER's Stern Pod range designed to simplify the traditionally problematic installation of stern thrusters in motor boats. This single pre-assembled unit reduces potential installation errors, has twin propellers, a 185mm diameter stern tunnel complete with deflectors and a thrust rating of 115/253 (kg/lbs).

### Specifications

<b>Code</b>	<b>317631</b>
<b>Model</b>	CT 125
<b>Boat size</b>	10.5m - 18m 34 - 59'
<b>Voltage</b>	24 V
<b>Thrust up to</b>	115 kg / 253 lbs
<b>Power</b>	8.6 kW / 11.5 hp
<b>Weight</b>	41 kg
<b>Tunnel Ø</b>	185mm

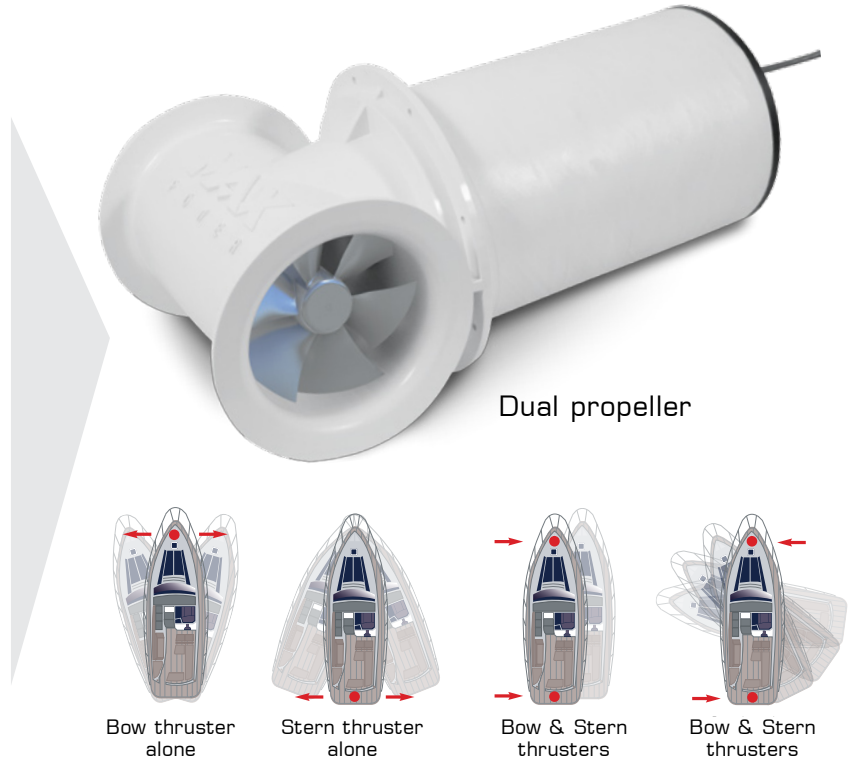

### Unique Features:




Ignition Protected & Water Resistant



Composite drive legs  
Zero maintenance



Line shields



High spec. DC contactors



High power connections



Purpose built DC motors



Unrivalled safety features




Case hardened spiro-conical gears

### Stern Pod Installation:

Easy to install and requiring nothing other than simple electrical connections, the Stern Pod greatly reduces installation time.

The Stern Pod can be directly fitted from the outside of the boat thus requiring little or no work in the often inaccessible and cramped transom area.

Ignition protected and water resistant, the thruster's motor is protected from water and the corrosive atmosphere in the bilge.

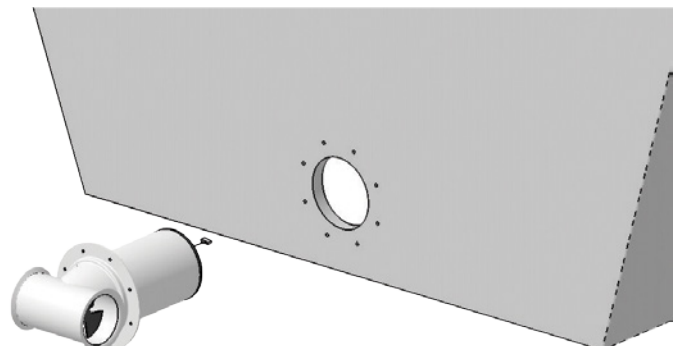

NB. Performance data is given for a thruster installed at one tunnel diameter immersion depth, in a tunnel no longer than twice the tunnel's diameter and this within a variation of + / - 6%. Higher voltages will result in higher thrust ratings, higher power consumption and a reduced duty cycle. Longer tunnels will result in lower thrust ratings and higher power consumption.